
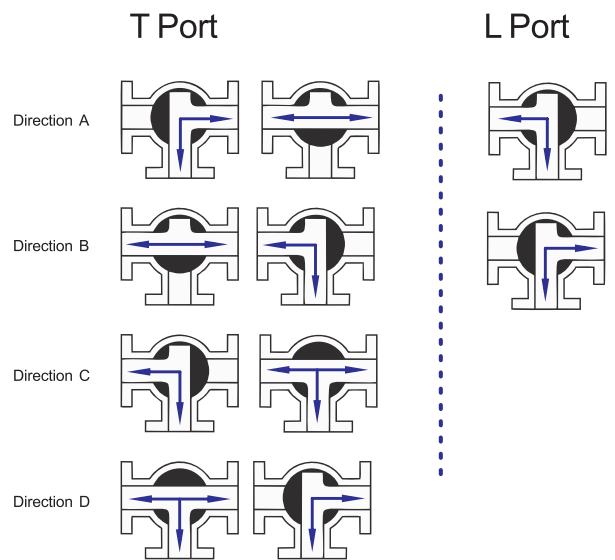


**VE-MT MINIATURE MOTORIZED 3-WAY BALL VALVE**

Discover the efficiency of our miniature electric 3-way ball valve with a compact design for precise fluid control in your systems.


**Technical Parameters**

Product Specifications	DN10~DN25
Max. Working Pressure	1.0MPa
Circulation Medium	Water, Air
Rated Voltage	AC/DC 110-230V, DC9-24V (Optional)
Open/Close Time	≤15S
Life Time	70,000 Times
Valve Material	SS304, SS316 (Optional)
Actuator Material	Engineering Plastics
Torque Output	10.0N.M, 15.0N.M
Ambient Temperature	-15°C-50°C
Liquid Temperature	2°C-90°C
Cable length	0.5m, 1.5m (Optional)
Manual Override	NO
Indicator	YES or NO (Optional)
Actuator rotation	90°
Sealing Material	FKM & PTFE
Protection Class	IP67

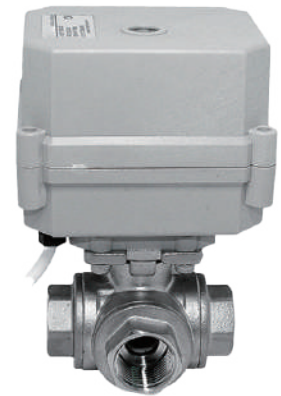


**Main Parts Materials**

NO.	Name	material
1	Actuator	PPO A100
2	Body Cover	STAINLESS STEEL 304
3	O-Ring	FKM
4	Sealing	PTFE
5	Ball	STAINLESS STEEL 304
6	Stem	STAINLESS STEEL 304
7	O-Ring	FKM

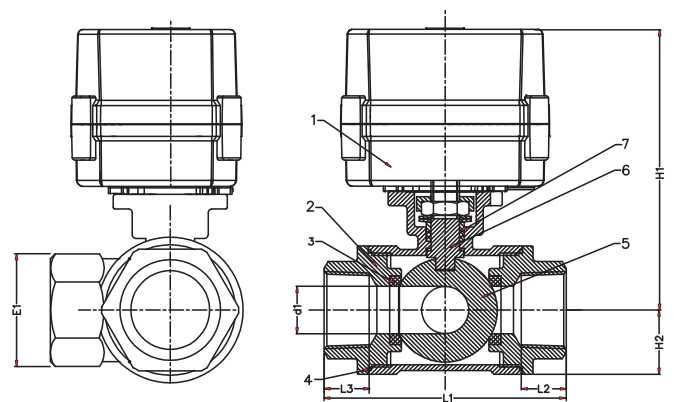


**Outline Size Dimension**

Size	D1/D2	d	L1	L2/L3	E1	H1	H2
DN10	3/8"	6	51	11	20.2	66	11
DN15	1/2"	12	70	16	27	72	17
DN20	3/4"	15	75	16	31	76.5	20.5
DN25	1"	18	85	17	38	78	20.5

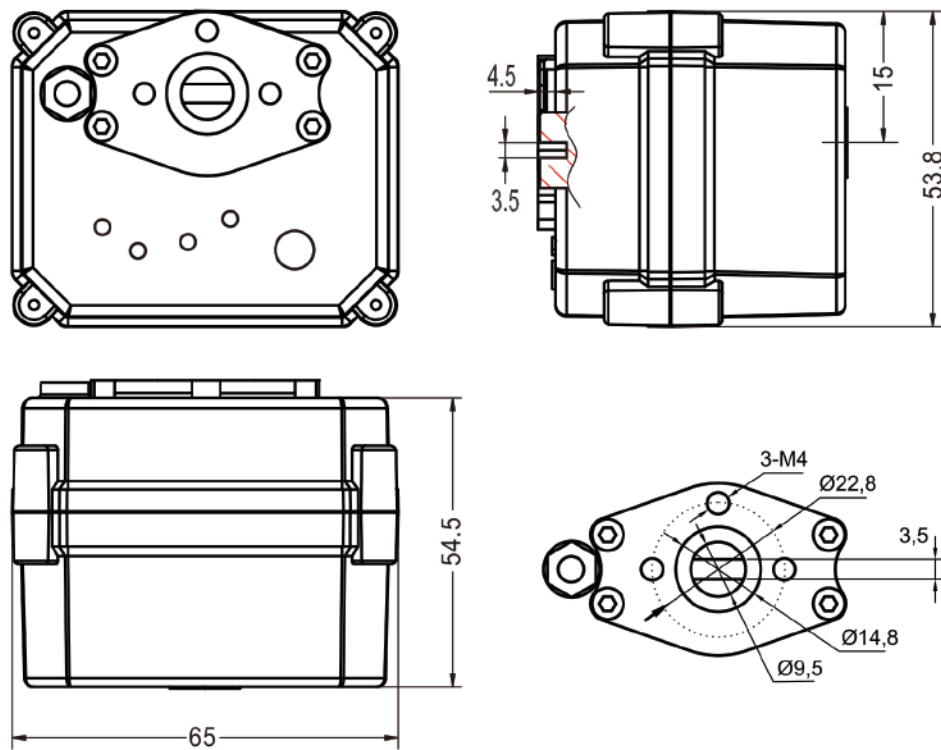


## A20 Actuator Technical Parameters

Working Current	≤500mA
Max. Working Pressure	1.0MPa
Circulation Medium	Water, Air
Rated Voltage	AC/DC 110-230V, DC9-24V (Optional)
Open/Close Time	≤ 5S
Life Time	70,000 Times
Valve Material	SS304, SS316, BRASS, UPVC (Optional)
Actuator Material	Engineering Plastics
Torque Output	2.0N.M
Liquid Temperature	2°C-90°C
Ambient Temperature	-15°C-50°C
Cable length	0.5m, 1.5m (Optional)
Manual Override	YES or NO (Optional)
Indicator	YES or NO (Optional)
Actuator rotation	90°
Line Control	CR201, CR202, CR301, CR302, CR303, CR305, CR401, CR501, CR502, CR701, CR702, CR703, CR704, CR705, CR706 and External Regulation
Sealing Material	FKM & PTFE
Protection Class	IP67

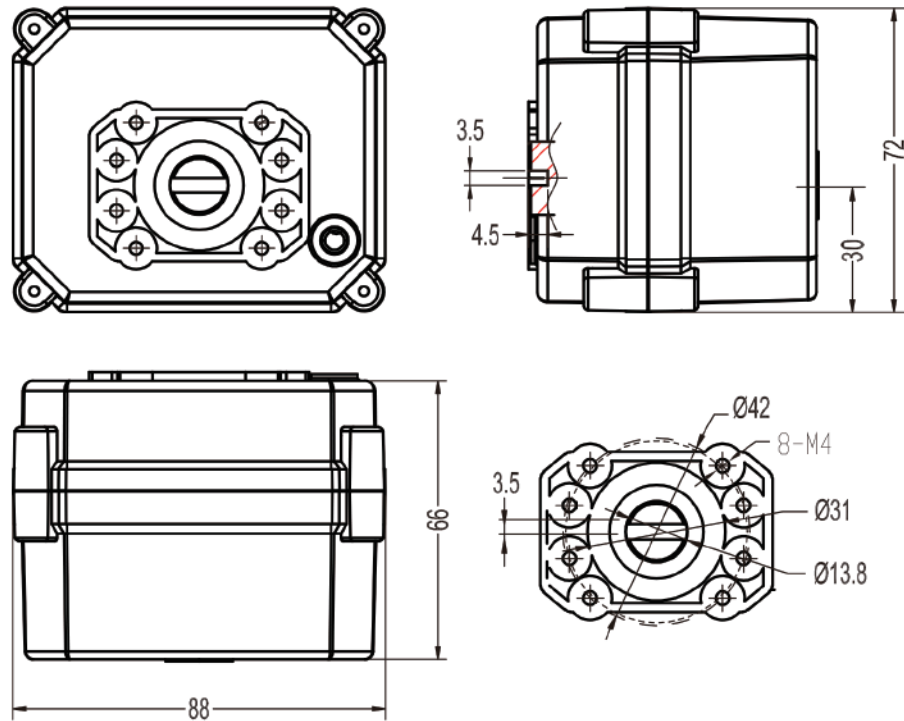

### A100 Actuator Technical Parameters

Working Current	≤800mA
Max. Working Pressure	1.0MPa
Circulation Medium	Water, Air
Rated Voltage	AC/DC 110-230V, DC9-24V (Optional)
Open/Close Time	≤ 10S
Life Time	70,000 Times
Valve Material	SS304, SS316, BRASS, UPVC (Optional)
Actuator Material	Engineering Plastics
Torque Output	10.0N.M
Liquid Temperature	2°C-90°C
Ambient Temperature	-15°C-50°C
Cable length	0.5m, 1.5m (Optional)
Manual Override	NO
Indicator	YES or NO (Optional)
Actuator rotation	90°
Line Control	CR201, CR202, CR301, CR303, CR305, CR401, CR501, CR502, CR703, CR704, CR705, CR706 and External Regulation
Sealing Material	FKM & PTFE
Protection Class	IP67

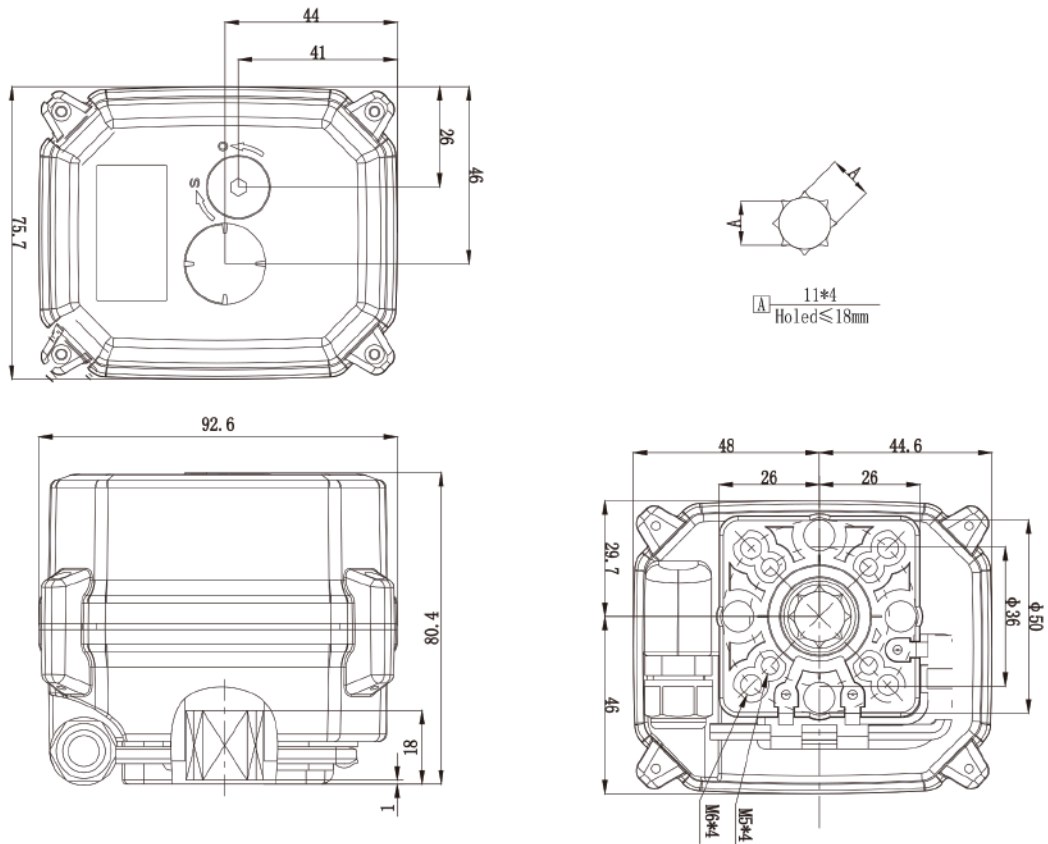

## A150 Actuator Technical Parameters

Max. Working Pressure	1.0MPa
Circulation Medium	Water, Air
Rated Voltage	AC/DC 110-230V, DC9-24V (Optional)
Open/Close Time	≤ 12S
Life Time	70,000 Times
Valve Material	SS304, SS316, BRASS, UPVC (Optional)
Actuator Material	Engineering Plastics
Torque Output	15.0N.M
Liquid Temperature	2°C-90°C
Ambient Temperature	-15°C-50°C
Cable length	0.5m, 1.5m (Optional)
Manual Override	YES or NO (Optional)
Indicator	YES or NO (Optional)
Actuator rotation	90°
Line Control	CR201;CR202;CR301;CR303;CR306;CR501;CR502; CR702;CR703;CR706 and External Regulation
Sealing Material	FKM & PTFE
Protection Class	IP67




**A20-S-A Series**

- Indicator
- Manual Override


**A20-S-B Series**

- Indicator
- Manual Override



**A20-S-C Series**

- Indicator
- Manual Override

**CR2 01 Wiring Diagram ( 2 wires control )**


- 1, RD connect with positive, the BK connect with negative, the valve closed, the actuator automatically power off after in place , the valve remains fully closed position
- 2, BK connect with positive, the RD connect with negative, the valve open, the actuator automatically power off after in place, the valve remains fully open position .

- \* Suitable Working Voltage: DC5V/DC12V/DC24V
- \* Exceeding the working voltage is forbidden

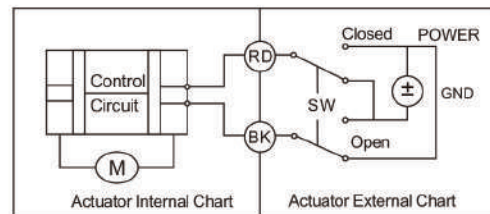
**CR2 02 Wiring Diagram ( 2 wires control – Spring return in case of the power failure)**


- 1, When SW is closed , the valve open. the actuator automatically power off after in place
- 2, When SW is open, the valve closed, the actuator automatically power off after in place

- \* Suitable Working Voltage: AC/DC9-35V, AC/DC110V-230V
- \* Exceeding the working voltage is forbidden

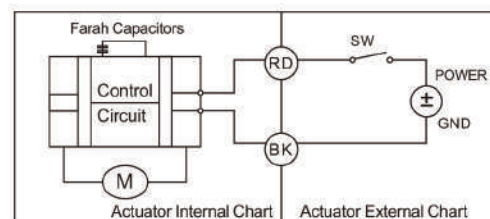
**CR3 01 Wiring Diagram (3 wires control )**

- 1, RD & GR connect with positive, BK connect with negative
- 2, When OPEN (RD) & SW connected, the valve open, the actuator automatically power off after in place, valve remains fully open position
- 3, When CLOSE (GR) & SW connected, the valve closed, the actuator automatically power off after in place, valve remains fully closed position

- \* Suitable Working Voltage: DC5V,AC/DC9-24V
- \* Exceeding the working voltage is forbidden

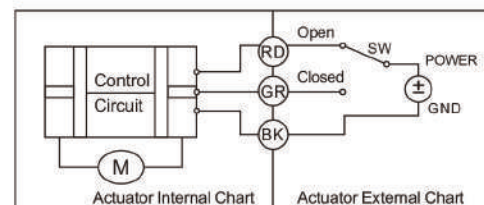




### CR3 02 Wiring Diagram (3 wires control )

- 1, RD connect with positive, the BK & GR connect with negative
- 2, SW CLOSED, the valve OPEN, the actuator automatically power off after in place.
- 3, SW OPEN, the valve CLOSED, the actuator automatically power off after in place.


- \* Suitable Working Voltage: DC9V-35V
- \* Exceeding the working voltage is forbidden

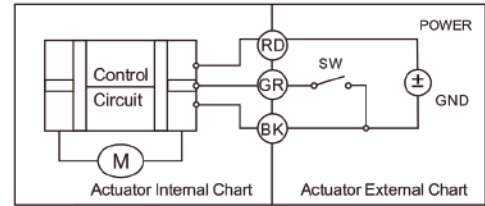

### CR3 03 Wiring Diagram (3 wires control)

- 1, RD& GR connect with positive, the BK connect with negative
- 2, SW CLOSED, the valve OPEN, the actuator automatically power off after in place
- 3, SW OPEN, the valve CLOSED, the actuator automatically power off after in place.


- \* Suitable Working Voltage: AC/DC9-24V,AC110-230V.
- \* Exceeding the working voltage is forbidden

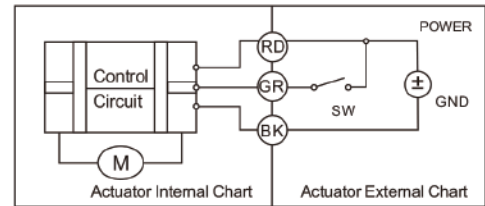

### CR3 04 Wiring Diagram (3 wires control)

- 1, RD & GR connected with positive, and the BK connected with negative
- 2, When RD & SW connected, the valve closed, the actuator automatically power off after in place , remains fully closed position
- 3, When GR & SW connected, the valve open, the actuator automatically power off after in place, remains fully open position


- \* Suitable Working Voltage: DC5V, DC12V, DC24V
- \* Exceeding the working voltage is forbidden

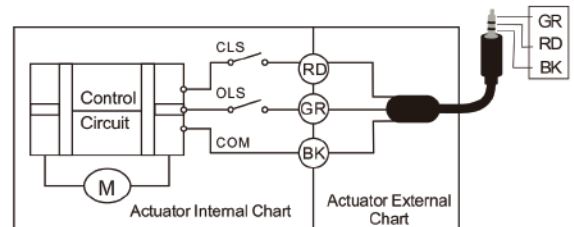

### CR3 05 Wiring Diagram(3 wires control)

- 1, RD connect with positive, GR connect with SW & positive
- 2, BK connect with negative
- 3, When the SW of GR closed, the valve closed, the actuator automatically power off after in place , remains fully closed position
- 4, When the SW of GR open, the valve open, the actuator automatically power off after in place , remains fully open position


- \* Suitable Working Voltage: AC/DC9-24V,AC110-230V.
- \* Exceeding the working voltage is forbidden

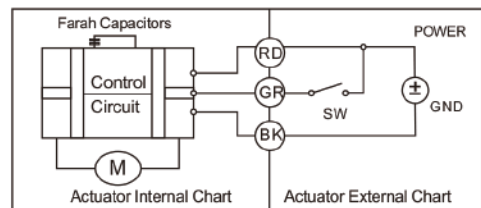

### CR3 06 Wiring Diagram(3 wires control)


- 1, RD connect with positive, GR connect with SW & positive
- 2, BK connect with negative
- 3, When the SW of GR closed, the valve open, the actuator automatically power off after in place , remains fully closed position
- 4, When the SW of GR open, the valve closed, the actuator automatically power off after in place , remains fully open position.

- \* Suitable Working Voltage: AC/DC9-24V,AC110-230V
- \* Exceeding the working voltage is forbidden

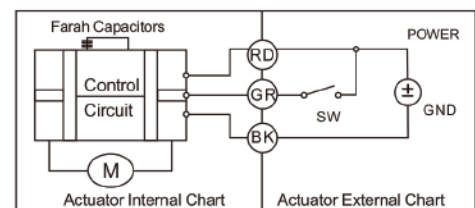


### CR4 01 WIRING DIAGRAM(4 WIRES CONTROL)

- 1, RD&BK are connected to the power, WT&YW are connected to the controlled wiring.
- 2, When the sw is closed, the valve open
- 3, When the sw is open, the valve closed
- 4, Suitable working voltage: AC/DC 110V-230V (No manual)
- 5, Exceeding the working voltage is forbidden

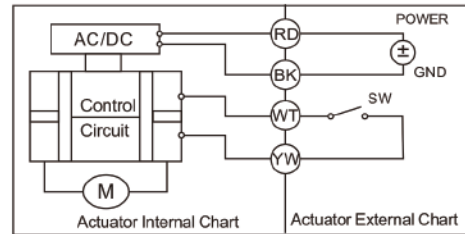


### CR5 01 WIRING DIAGRAM ( WITH FEEDBACK SIGNAL)

- 1, RD connect with positive, the BK connect with negative, the valve closed, the actuator automatically power off after in place
  - 2, BK connect with positive, the RD connect with negative, the valve open, the actuator automatically power off after in place
  - 3, BL & WT are connect when the valve open fully, YW&WT are connect when the valve closed fully
- \* Suitable Working Voltage: DC5V/DC12V/DC24V
  - \* Exceeding the working voltage is forbidden

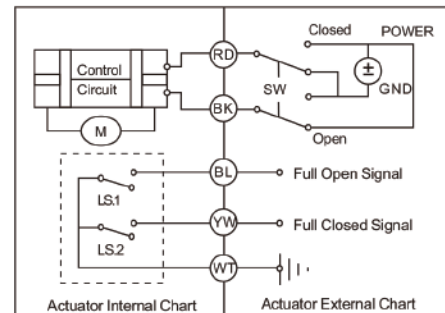


### CR502 WIRING DIAGRAM ( 5 WIRES CONTROL – SPRING RETURN)

- 1, When SW is closed , the valve open. the actuator automatically power off after in place
  - 2, When SW is open, the valve closed, the actuator automatically power off after in place BL & WT are connect when the valve open fully, YW & WT are connect when the valve closed fully
- \* Suitable Working Voltage: AC/DC9-24V, AC/DC110-230V,
  - \* Exceeding the working voltage is forbidden

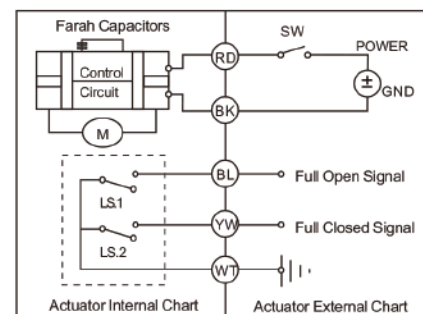

### CR7 01 WIRING DIAGRAM ( 7 WIRES CONTROL )

- 1, RD connect with positive
  - 2, GR connect with SW and negative wiring
  - 3, BK connect with negative wiring
  - 5, SW closed. the valve closed, and keeping fully closed.
  - 6, BL & GY connect with the valve's fully open signal wiring
  - 7, YW & WT connect with the valve's fully closed signal wiring.
- \* Suitable Working Voltage: DC9V-35V
  - \* Exceeding the working voltage is forbidden
  - \* Feedback with load ability

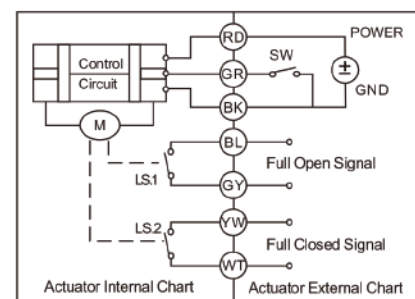


①The Max. off voltage: DC36V

②The Max. off current: 0.4A




### CR7 02 Wiring Diagram ( 7 wires control )

1. RD & GR connect with positive, the BK connect with negative
  2. When RD & SW connected, the valve open, the actuator automatically power off after the valve fully open.
  3. When GR & SW connected, the valve closed, the actuator automatically power off after the valve fully closed.
  4. BL & GY connect with the valve' s fully open signal wiring
  5. YW & WT connect with the valve' s fully closed signal wiring
- \* Suitable Working Voltage:DC5V,DC12V, DC24V
  - \* Exceeding the working voltage is forbidden
  - \* Feedback with load ability
- ①The Max. off voltage: DC36V    ②The Max. off current: 0.4A

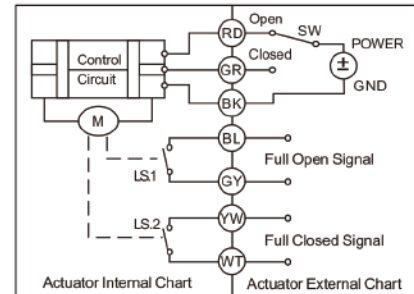


### CR7 03 Wiring Diagram ( 7 wires control )

- 1, RD& GR connect with positive, the BK connect with negative
  - 2, SW CLOSED, the valve OPEN, the actuator automatically power off after in place
  - 3, SW OPEN, the valve CLOSED, the actuator automatically power off after in place
  - 4, BL & GY connect with the valve' s fully open signal wiring
  - 5, YW & WT connect with the valve' s fully closed signal wiring.
- \* Suitable Working Voltage: AC/DC9-24V, AC110-230V
  - \* Exceeding the working voltage is forbidden

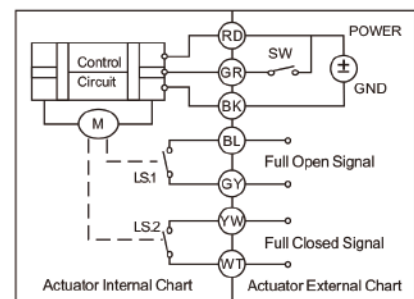

### CR7 04 Wiring Diagram ( 7 wires control )

- 1, RD & BK are connected to the power, WT & YW are connected to the controlled wiring.
  - 2, When the SW is closed , the valve open
  - 3, When the SW is open , the valve closed
  - 4, BL & GY connect with the valve' s fully open signal wiring
  - 5, YW & WT connect with the valve' s fully closed signal wiring.
- \* Suitable Working Voltage: AC/DC110V-230V
  - \* Exceeding the working voltage is forbidden

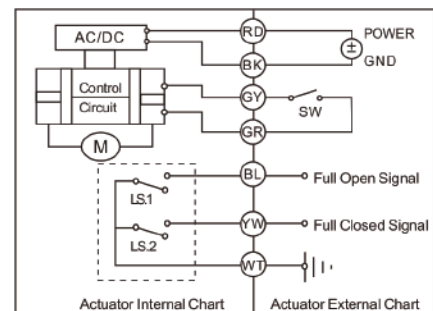


## CR705 (7-wire control-with power-off reset and signal feedback function)

### 1. Power-off shut-off valve

1. Connect the red wire and the green wire to the positive pole, and the to the negative pole.
2. When the green line switch is closed, the valve opens. After the valve is opened, the blue line and the gray line are connected, and the valve stops automatically.
3. When the green line switch is off, the valve is closed. After the valve is closed, the yellow line and white line are connected, and the valve automatically stops.
4. The valve automatically closes after disconnecting the power

\* Voltage selection: AC/DC9-24V AC110-230V

\* Do not exceed the voltage to work

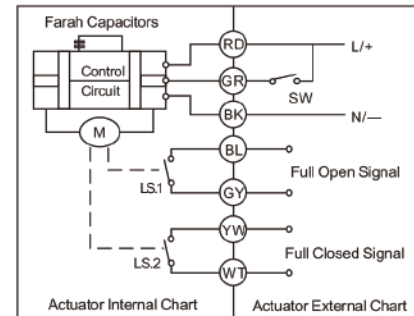

### 2. Turn off the power and open the valve

1. Connect the red wire and the green wire to the positive pole, and the black wire to the negative pole.
2. When the green line switch is closed, the valve is closed. After the valve is closed in place, the yellow line and white line are connected, and the valve stops automatically.
3. When the green line switch is off, the valve opens. After the valve is opened, the blue line and the gray line are connected, and the valve stops automatically.
4. The valve opens automatically after disconnecting the power

\* Voltage selection: AC/DC9-24V AC110-230V

\* Must not exceed voltage


## CR706 (7-wire control --- with power-off reset and signal feedback function)

### 1. Power-off shut-off valve

1. Connect the red wire and the green wire to the positive pole, and the black wire to the negative pole.
2. When the green line switch is closed, the valve is closed. After the valve is closed, the yellow line and the white line are connected, and the valve stops automatically;
3. When the green line switch is off, the valve opens, and the blue line and gray line are connected after the valve is opened, and the valve stops automatically;
4. The valve automatically closes after disconnecting the external power supply

\* Voltage selection: AC/DC9-24V AC110-230V

\* Do not exceed the voltage to work

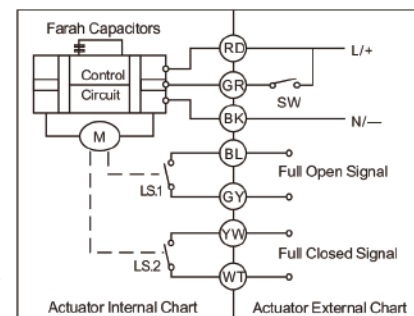

### 2. Turn off the power and open the valve


1. Connect the red wire and the green wire to the positive pole, and the black wire to the negative pole.
2. When the green line switch is closed, the actuator will turn counterclockwise and the valve will open. After the valve is opened, the blue line and gray line will be connected, and the valve will stop automatically;
3. When the green line switch is disconnected, the actuator will turn clockwise and the valve will be closed. After the valve is closed, the yellow and white lines will be connected, and the valve will stop automatically;
4. The valve opens automatically after disconnecting the external power supply

\* Voltage selection: AC/DC9-24V AC110-230V

\* Must not exceed voltage


### Adjustable wiring diagram (5-wire control, supporting A20 actuator)

- 1, RD connects DC9–24V positive
  - 2, BK connects DC9 ~ 24V negative pole / 4–20mA / 0–10V negative pole
  - 3, YW is connected to the wrong output signal, OC output
  - 4, GR connected to P position input/control current positive/ control voltage positive (4–20mA / 0–10V)
  - 5, WT connects to position output, OC outputs PWM signal
- PWM frequency: 100Hz, duty: 5–95%

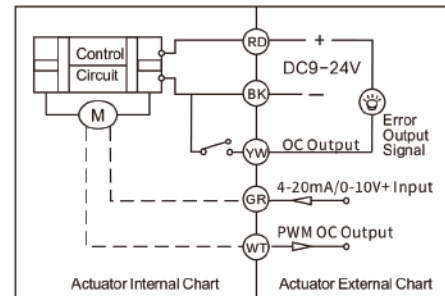

### Adjustable wiring diagram (6-wire control, supporting A150 actuator)

- 1, RD connects DC9–24V positive
  - 2, BK connects DC9 ~ 24V negative pole / 4–20mA negative pole / 0–10V negative pole
  - 3, YW is connected to the wrong output signal, OC output
  - 4, GR connected to P position input/control current positive/ control voltage positive (4–20mA/0–10V)
  - 5, WT connection position outputs 4–20mA/0–10V signal
- PWM frequency: 100Hz, duty: 5–95%

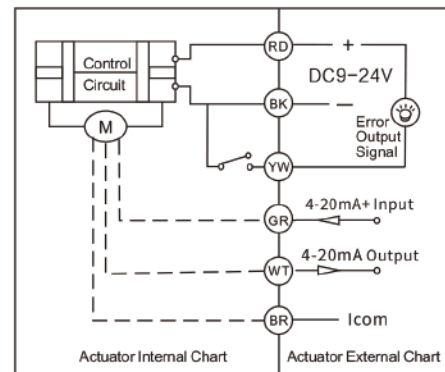

### Manual override instructions:

In case of an electric supply failure, it is possible to operate the actuator manually:

- 1, Power must in off position when start the manual override.
- 2, Gently pull up the knob about 3mm, then revolve the knob around left and right to control the valve open or close.
- 3, When the red needle in the indicator pointing to S, means the valve is closed. When pointing to 0, means the valve is open.
- 4, After finish the manual override operation, must press down the knob, so that for the normal electric operation.



**VINCER VALVE**  
VALVE AUTOMATION TECHNOLOGY

VINCER

## GET IN TOUCH VALVE CONSULTANT

**Hebe Wong**

+86 13826949015

[www.vincervalve.com](http://www.vincervalve.com)

Address: Room No. 203, Building No.1, Zhangcun  
Dayuan Road No. 110, Dongcheng District,  
Dongguan City, Guangdong Province



QUALITY VALVE AND UNBEATABLE VALUE